4. Ölfüllung

- Füllmenge: **6,0 l**
- Qualität: Industriegetriebeöl **ISO VG 220** oder Kfz-Getriebeöl **SAE 90 GL4**
- Intervalle: erster Ölwechsel nach **50 Betriebs stunden** danach alle **1000 Betriebs-stunden**, spätestens jedoch nach **12 Monaten.**

Bei Verwendung der Pumpe auf Fahrzeugen (mögliche Schräglage im Betrieb) und/oder Pumpendrehzahlen zwischen 300 min^{-1} und 500 min^{-1} beträgt die Ölfüllmenge **7.0 l**.

Zur Kontrolle hierzu den Ölmessstab in die Bohrung neben dem Transporthaken einsetzen.

4. Oil filling

Filling quantity: **6,0 l**


- Quality: Industrial gear oil **ISO VG 220** or automotive gear oil **SAE 90 GL4**
- Intervals: first oil change after **50 operating hours** then every **1000 operating hours**, but at the latest after **12 months.**


If the pump is mounted on a vehicle (possible inclined position during operation) and/or if the pump speed is between 300 rpm and 500 rpm, the oil quantity is **7.0 l**.

To check, put the oil dipstick in the bore situated beside the eye bolt.

5. Abmessungen / Dimensions

P71/200-130
P71/200-130G

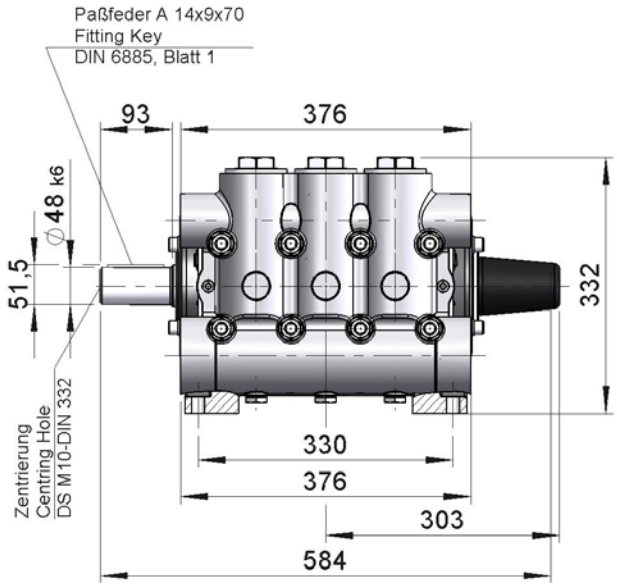

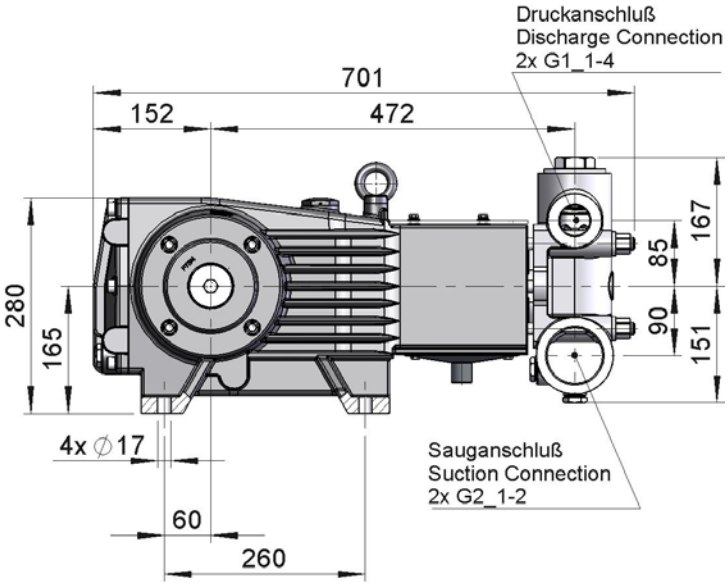

© Speck-Kolbenpumpenfabrik, Geretsried